


MT Hood

SDM-SDVoE-R

SDVoE Receiver for SDM

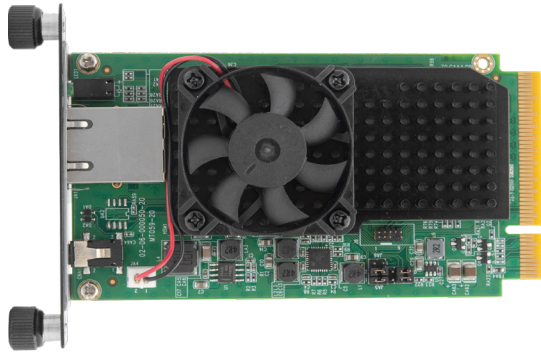

SDM-SDVoE-R

Key Features

- SDVoE receiver for SDM-S
- Supports HDMI 2.0/HDCP 2.2/1.4
- Supports UHD RGB/4:4:4 8 bit, 4:2:0 10 bit and 12 bit HDR
- Supports all resolutions up to 594 MHz
- Extends signals up to 330 feet (100 meters)
- Supports CEC pass-through
- Supports up to 8 channels of audio, including PCM, Dolby True-HD and DTS-master audio
- Supports RS-232
- 10Gbps Ethernet Interface
- 1Gbps pass-through Ethernet Interface

Related Products

SDM-HDBT-R-UHD

SDM UHD HDBaseT Receiver

SDM-SDI-HDTV-UHD

SDM 12G SDI Receiver

Specifications

| | |
|--------------------------|---|
| Model | SDM-SDVoE-R |
| Input | 10Gbps Ethernet Interface |
| Output | SDM Connector |
| Dimensions | 80 mm Width x 112 mm Depth |
| Power Consumption | Up to 10 W |
| Environment | Operating temperature: -20C ~ 60C, Humidity: 10%~90% / non-condensing |