


# MT Hood

## SDM-NDI-QR

Quad Split NDI multiviewer for SDM

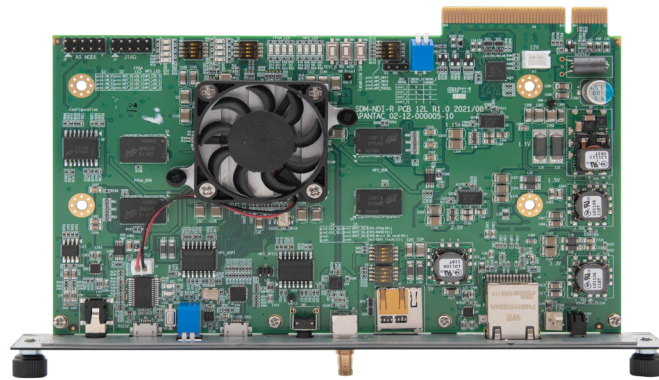

SDM-NDI-QR

### Key Features


- Quad split NDI receiver for SDM-L
- Decode and display up to 4 x 1080P high bandwidth NDI streams
- Fixed Quad Split, each window can go full screen
- Display up to 8 audio meters per window
- 2 GPI tallies per window
- 8 GPI contacts, can be configured for tally or ASCII protocol
- Borders can be turned on or off
- One 32 character label per window
- Safe area markers
- Visual Alarm tags for audio and video presence
- Supports UHD@60Hz, RGB 444 output
- Supports NDI v5
- Supports Analog audio monitoring output
- 3G SDI output
- 10/100/1000 Base Ethernet Interface
- 3 year limited warranty



# MT Hood

## SDM-NDI-QR

### Rear View

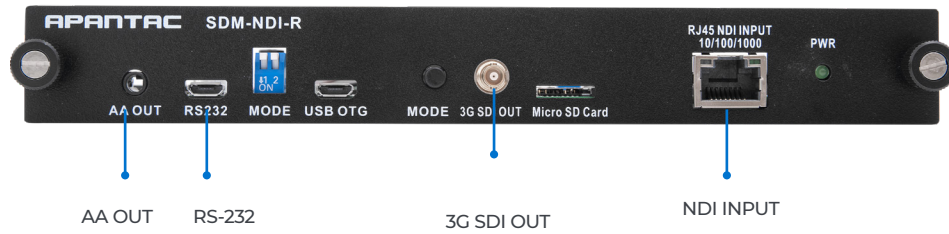

### Specifications

<b>Model</b>	SDM-NDI-QR
<b>Input</b>	Up to 1 Gbps Ethernet Interface
<b>Output</b>	SDM Connector
<b>Dimensions</b>	195 mm Width x 112 mm Depth
<b>Power Consumption</b>	Up to 10 W
<b>Environment</b>	Operating temperature: -20C ~ 60C, Humidity: 10%~90% / non-condensing